


NUTMEG – High Temperature Manhole Pump

NW521- HT The NW521 is an extremely lightweight pump: 29.5 lbs. (excl. cable) with a capacity as high as pumps that normally weigh between 40 and 73 lbs. in our competitor' range! Trouble-free operation with service intervals every 6 months (service performed in a few minutes only) makes the NW521 **an ideal pump for Steam Manholes.**

FEATURES: The shaft seals are grease lubricated. The pump seal consists of one radial lip seal (Simmer rings). The motor seal consists of one radial lip seal (Simmer ring). Both the pump seal and the motor seal are built in one complete unit of aluminum filled with grease. The rotor shaft has a tungsten carbide wear sleeve rotating against the lip seals.

<u>Model</u>	<u>HP</u>	<u>RPM</u>	<u>Voltage</u>	<u>Amps</u>	<u>Phase</u>	<u>Discharge</u>	<u>Weight</u>	<u>Height</u>	<u>Width</u>
NW521	2	3450	115/230	13	1& 3	2"	27.5	15"	7.2"

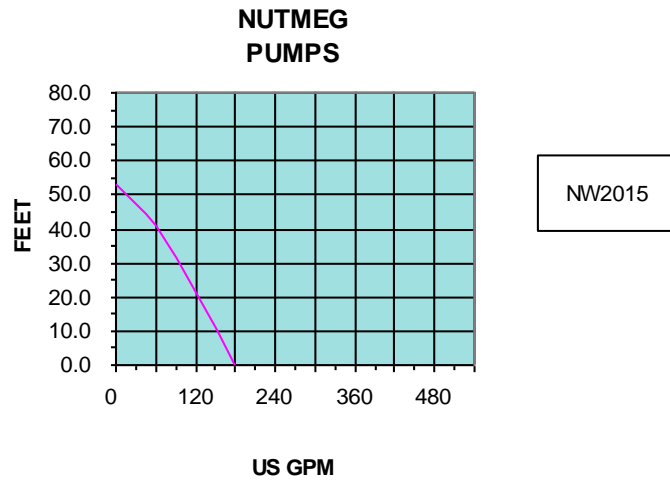

Material of Construction:

- Motor Housing: Aluminum
- Stator: HT 180 C
- Power cable: HT 200 C
- O-rings: HT Viton
- Shaft: Stainless Steel
- Mechanical Seals: Silicon Carbide-Tungsten Carbide-Carbon/Ceramic
- Bearings: Heavy-duty ball
- Impeller: Chrome (25%) steel 550 HB
- Strainer: Plastic STD, stainless or galvanized optional
- Cable Length: NW521-HT 35 feet – all others 65 feet



Sold in the United States by:
Nutmeg Utility Products, Inc.
 1755 Highland Avenue - Cheshire, CT 06410
 Tel: 203/272-2291 * Fax: 203/272-1830
 Website: www.nutmegutility.com

Distributed by: